

INVITAIC
Invisible Photovoltaic


PETROGLYPH




Petroglyph catches whispers of time and engraves them on its body. Shallow and deep imprints of history in light or in dark that Petroglyph has rendered fills the building with charm, as humans, who once were clumsy but finally find their inner dexterity, weave with Petroglyph ancient and beautiful stories, leaving their traces you may notice in the silent and mysterious art that does not go astray over thousands of years. The building with Petroglyph is more than just a reinforced concrete structure, where, with a bit of patience, you can hear murmur of history echoes and notice how the trajectory of time reveals.

INVITAIC

Module Model

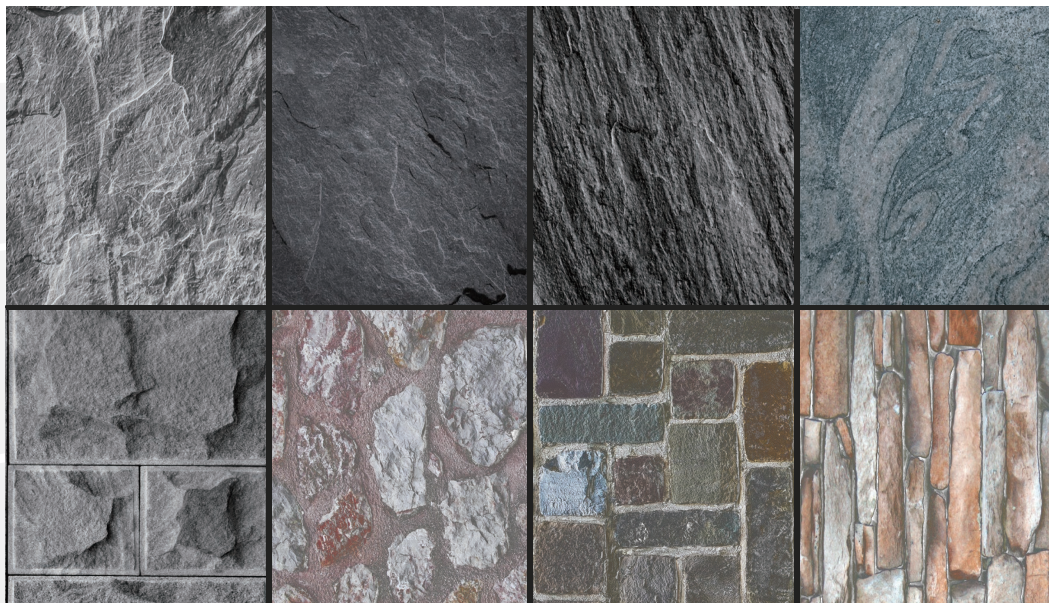

LINEAR PERFORMANCE WARRANTY

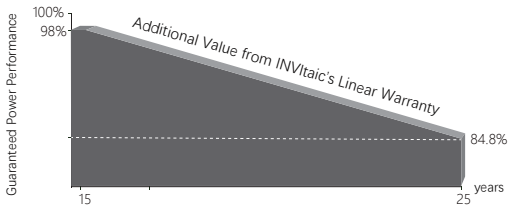

15 Year Product Warranty

25 Year Linear Power Warranty

0.55% Annual Degradation Over 25 years

Glass	Heat Strengthened Glass
Junction Box	IP68 Rated
Output Cables	TUV 1x4.0 mm ² Customized Length
Maximum System Voltage	1500 VDC (IEC)
Maximum Series Fuse Rating	30 A
Power Tolerance	0~±3 %
Temperature Coefficients of Pmax	-0.35 %/°C
Temperature Coefficients of Voc	-0.29 %/°C
Temperature Coefficients of Isc	0.048 %/°C
Nominal Operating Cell Temperature (NOCT)	45±2 °C
CTM	63-68 %



Thickened Double-Layer
Tempered Glass



High Impact Resistance



50% Increased High Mechanical
Performance Modules



Optimized Soundproofing
Insulation

Higher Aesthetics

Inherent advantages of integration in module design, better appearance without metal wire exposition.

Higher Power Efficiency

Higher-density cell arrangement can put more cells per unit area and achieve higher module efficiency, meet the requirements for energy-saving buildings.

Building Integrated Higher Safety

Double layers of tempered glass to meet the requirements of building safety: with fireproofing, better wind load, heat resistance and frost resistance. Be used as building unit for integrated installation.

