


BLUES




Deep and elegant blue of the building guides your spirit to a shore where tides ebb and flow only for you. Sunlight charges into the building but land softly on fingers dancing on a piano, unfettering notes that carry the melody of Blues that changes in rays freely. This is how Blues goes: the space within a building expands, as vast as oceans and sky; all of a sudden, a small stone is cast into a deep blue lake, with ripples one after another, spreading possibilities in the structure.

INVITAIC

Module Model

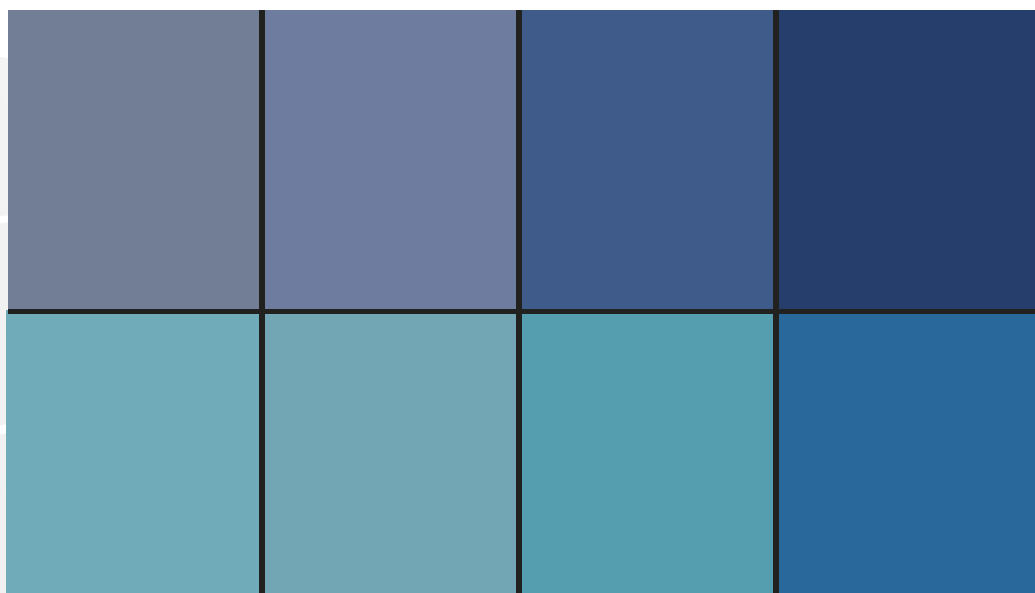

LINEAR PERFORMANCE WARRANTY

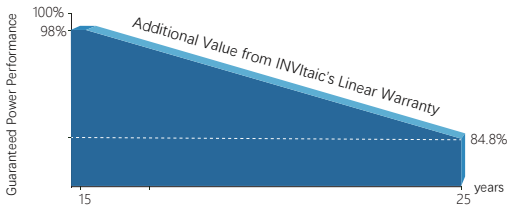

15 Year Product Warranty

25 Year Linear Power Warranty

0.55% Annual Degradation Over 25 years

Glass	Heat Strengthened Glass
Junction Box	IP68 Rated
Output Cables	TUV 1x4.0 mm ² Customized Length
Maximum System Voltage	1500 VDC (IEC)
Maximum Series Fuse Rating	30 A
Power Tolerance	0 ~ ±3 %
Temperature Coefficients of Pmax	-0.35 %/°C
Temperature Coefficients of Voc	-0.29 %/°C
Temperature Coefficients of Isc	0.048 %/°C
Nominal Operating Cell Temperature (NOCT)	45 ± 2 °C
CTM	66-77 %



Thickened Double-Layer
Tempered Glass



High Impact Resistance



50% Increased High Mechanical
Performance Modules



Optimized Soundproofing
Insulation

Higher Aesthetics

Inherent advantages of integration in module design, better appearance without metal wire exposition.

Higher Power Efficiency

Higher-density cell arrangement can put more cells per unit area and achieve higher module efficiency, meet the requirements for energy-saving buildings.

Building Integrated Higher Safety

Double layers of tempered glass to meet the requirements of building safety: with fireproofing, better wind load, heat resistance and frost resistance. Be used as building unit for integrated installation.

