


TERRACOTTA


If buildings can take us to the past, Terracotta is the flexible and reliable clockwork that reverses time. Time flows in silence, but Terracotta on its way to seeking a balance between red brick and embroidered brown with gentleness and simplicity records human vicissitudes as well as architecture evolution, crystalized as human wisdom and the constant core of architecture. This historian still writes pages telling the stories of nature and human and the charm of the ancient past. In those standing buildings, it has lasted for ages.

INVITAIC

Module Model

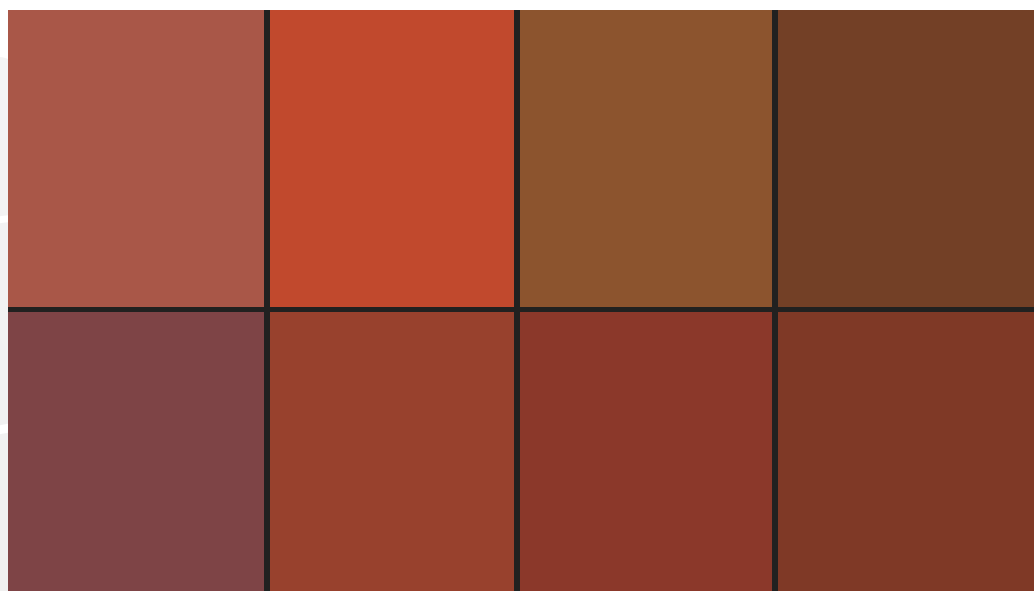

LINEAR PERFORMANCE WARRANTY

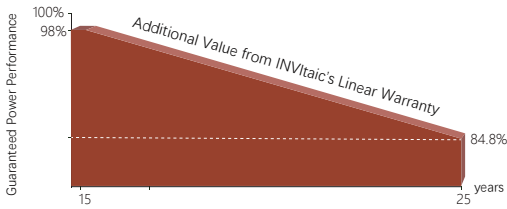

15 Year Product Warranty

25 Year Linear Power Warranty

0.55% Annual Degradation Over 25 years

Glass	Heat Strengthened Glass
Junction Box	IP68 Rated
Output Cables	TUV 1x4.0 mm ² Customized Length
Maximum System Voltage	1500 VDC (IEC)
Maximum Series Fuse Rating	30 A
Power Tolerance	0~±3 %
Temperature Coefficients of Pmax	-0.35 %/°C
Temperature Coefficients of Voc	-0.29 %/°C
Temperature Coefficients of Isc	0.048 %/°C
Nominal Operating Cell Temperature (NOCT)	45±2 °C
CTM	60-65 %



Thickened Double-Layer
Tempered Glass



High Impact Resistance



50% Increased High Mechanical
Performance Modules



Optimized Soundproofing
Insulation

Higher Aesthetics

Inherent advantages of integration in module design, better appearance without metal wire exposition.

Higher Power Efficiency

Higher-density cell arrangement can put more cells per unit area and achieve higher module efficiency, meet the requirements for energy-saving buildings.

Building Integrated Higher Safety

Double layers of tempered glass to meet the requirements of building safety: with fireproofing, better wind load, heat resistance and frost resistance. Be used as building unit for integrated installation.

